

## 18 VA

UI 39 H = 27

- Formato UI 39 / 13.5 • EN 61558, UL 506 • Size UI 39 / 13.5 • EN 61558, UL 506
- Protección fusible • Clase térmica BTa40 • Protection fuse • Thermal class BTa40

### Características / Features

Referencia	Primary	Secondary
EP 1806	2 X 115V	2 X 6 V 2 X 1.50 A
EP 1809	2 X 115V	2 X 9V 2 X 1.00 A
EP 1812	2 X 115V	2 X 12V 2 X 750 mA
EP 1815	2 X 115V	2 X 15V 2 X 600 mA
EP 1818	2 X 115V	2 X 18V 2 X 500 mA
EP 1824	2 X 115V	2 X 24V 2 X 375 mA

## 24 VA

UI 39 H = 31

- Formato UI 39 / 17 • EN 61558, UL 506 • Size UI 39 / 17 • EN 61558, UL 506
- Protección fusible • Clase térmica BTa40 • Protection fuse • Thermal class BTa40

### Características / Features

Referencia	Primary	Secondary
EP 2406	2 X 115V	2 X 6 V 2 X 2.00 A
EP 2409	2 X 115V	2 X 9V 2 X 1.34 A
EP 2412	2 X 115V	2 X 12V 2 X 1.00 A
EP 2415	2 X 115V	2 X 15V 2 X 800 mA
EP 2418	2 X 115V	2 X 18V 2 X 667 mA
EP 2424	2 X 115V	2 X 24V 2 X 500 mA

## 30 VA

UI 39 H = 35

- Formato UI 39 / 21 • EN 61558, UL 506 • Size UI 39 / 21 • EN 61558, UL 506
- Protección fusible • Clase térmica BTa40 • Protection fuse • Thermal class BTa40

### Características / Features

Referencia	Primary	Secondary
EP 3006	2 X 115V	2 X 6 V 2 X 2.50 A
EP 3009	2 X 115V	2 X 9V 2 X 1.67 A
EP 3012	2 X 115V	2 X 12V 2 X 1.25 A
EP 3015	2 X 115V	2 X 15V 2 X 1.00 A
EP 3018	2 X 115V	2 X 18V 2 X 834 mA
EP 3024	2 X 115V	2 X 24V 2 X 625 mA

## 40 VA

UI 48 H = 37

- Formato UI 48 / 17 • EN 61558, UL 506 • Size UI 48 / 17 • EN 61558, UL 506
- Protección fusible • Clase térmica BTa40 • Protection fuse • Thermal class BTa40

### Características / Features

Referencia	Primary	Secondary
EP 4006	2 X 115V	2 X 6 V 2 X 3.34 A
EP 4009	2 X 115V	2 X 9V 2 X 2.23 A
EP 4012	2 X 115V	2 X 12V 2 X 1.67 A
EP 4015	2 X 115V	2 X 15V 2 X 1.34 A
EP 4018	2 X 115V	2 X 18V 2 X 1.12 A
EP 4024	2 X 115V	2 X 24V 2 X 834 mA

## 60 VA



UI 48 H = 46

- Formato UI 48 / 26 • EN 61558, UL 506 • Size UI 48 / 26 • EN 61558, UL 506
- Protección fusible • Clase térmica BTa40 • Protection fuse • Thermal class BTa40



### Características / Features

Referencia	Primary	Secondary
EP 6006	2 X 115V	2 X 6 V 2 X 5.00 A
EP 6009	2 X 115V	2 X 9V 2 X 3.34 A
EP 6012	2 X 115V	2 X 12V 2 X 2.50 A
EP 6015	2 X 115V	2 X 15V 2 X 2.00 A
EP 6018	2 X 115V	2 X 18V 2 X 1.67 A
EP 6024	2 X 115V	2 X 24V 2 X 1.25 A

### Conexión primaria Primary connections




### Conexión secundaria Secondary connections





## UI 39



Pin out  
Pri. pins 1-4 / 6-9  
Sec. pins 12-14 / 17-19  
Dimensiones en mm  
Dimensions in mm

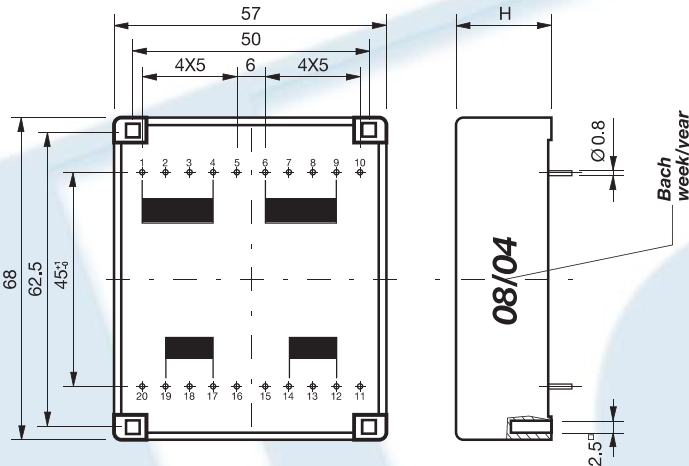

### Conexión primaria Primary connections



### Conexión secundaria Secondary connections



## UI 48

Pin out  
Pri. pins 2-5 / 8-11  
Sec. pins 13-15 / 22-24  
Dimensiones en mm  
Dimensions in mm

