











ALIMENTACIÓN NORMALIZADOS

REF.	PRIMARIO	TIPO CONEXIÓN	SECUNDARIO	MEDIDAS m/m							PESO GRS.
				A	B	C	D	E	F	G	
033	125v / 220v	a b c d	3v + 3v 0,6 Amp. 3v 0,3 Amp. - 3v 0,3 Amp 3v 0,9 Amp. 6v 0,3 Amp.	34	38	13	48	29			125
045	125v / 220v	a b c d	4,5v + 4,5v 0,4 Amp. 4,5v 0,2 Amp. - 4,5v 0,2 Amp. 4,5v 0,7 Amp. 9v 0,2 Amp.	34	38	13	48	29			125
103	125v / 220v	a b c d	6v + 6v 0,3 Amp. 6v 0,2 Amp. - 6v 0,2 Amp. 6v 0,5 Amp. 12v 0,2 Amp.	34	38	13	48	29			125
105	125v / 220v	a b c d	6v + 6v 0,5 Amp. 6v 0,3 Amp. - 6v 0,3 Amp. 6v 0,8 Amp. 12v 0,3 Amp.	39	44	14	55	34			187
107	125v / 220v	a b c d	6v + 6v 0,75 Amp. 6v 0,5 Amp. - 6v 0,5 Amp. 6v 1,2 Amp. 12v 0,5 Amp.	43	48	20	61	38			300
109	125v / 220v	a b c d	6v + 6v 1 Amp. 6v 0,7 Amp. - 6v 0,7 Amp. 6v 1,6 Amp. 12v 0,7 Amp.	43	48	20	61	38			300
110	125v / 220v	a b c d	6v + 6v 1,5 Amp. 6v 0,75 Amp. - 6v 0,75 Amp. 6v 1,7 Amp. 12v 0,8 Amp.	51	56	20	71	43			395
111	125v / 220v	a b c d	6v + 6v 2 Amp. 6v 1,2 Amp. - 6v 1,2 Amp. 6v 2,5 Amp. 12v 1,2 Amp.	53	60	20	70	45			500
113	125v / 220v	a b c d	6v + 6v 3 Amp. 6v 2 Amp. - 6v 2 Amp. 6v 4 Amp. 12v 2 Amp.	58	66	22	83	50			670
115	125v / 220v	a b c d	6v + 6v 4 Amp. 6v 2,3 Amp. - 6v 2,3 Amp. 6v 5 Amp. 12v 2,3 Amp.	64	75	25		57	43	62	990
117	125v / 220v	a b c d	6v + 6v 6 Amp. 6v 3 Amp. - 6v 3 Amp. 6v 7 Amp. 12v 3 Amp.	64	75	35		61	54	62	1340
304	125v / 220v	a b c d	7,5v + 7,5v 0,3 Amp. 7,5v 0,15 Amp. - 7,5v 0,15 Amp. 7,5v 0,45 Amp. 15v 0,15 Amp.	34	38	13	48	29			125

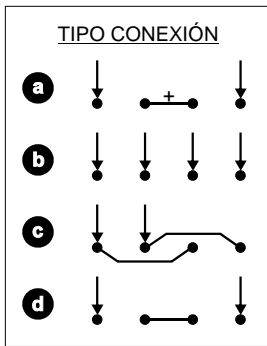






ALIMENTACIÓN NORMALIZADOS

REF.	PRIMARIO	TIPO CONEXIÓN	SECUNDARIO	MEDIDAS m/m							PESO GRS.
				A	B	C	D	E	F	G	
306	125v / 220v	a b c d	7,5v + 7,5v 0,5 Amp. 7,5v 0,3 Amp. - 7,5v 0,3 Amp. 7,5v 0,7 Amp. 15v 0,3 Amp.	39	44	14	55	34			187
307	125v / 220v	a b c d	7,5v + 7,5v 0,75 Amp. 7,5v 0,4 Amp. - 7,5v 0,4 Amp. 7,5v 0,9 Amp. 15v 0,4 Amp.	42	48	17	57	36			245
308	125v / 220v	a b c d	7,5v + 7,5v 1 Amp. 7,5v 0,7 Amp. - 7,5v 0,7 Amp. 7,5v 1,6 Amp. 15v 0,7 Amp.	51	56	20	71	43			395
309	125v / 220v	a b c d	7,5v + 7,5v 1,5 Amp. 7,5v 0,75 Amp. - 7,5v 0,75 Amp. 7,5v 2 Amp. 15v 0,75 Amp.	53	60	20	71	45			500
310	125v / 220v	a b c d	7,5v + 7,5v 2 Amp. 7,5v 1,3 Amp. - 7,5v 1,3 Amp. 7,5v 3 Amp. 15v 1,3 Amp.	58	66	22	83	50			670
312	125v / 220v	a b c d	7,5v + 7,5v 3 Amp. 7,5v 1,6 Amp. - 7,5v 1,6 Amp. 7,5v 4 Amp. 15v 1,6 Amp.	58	66	27	83	53			790
314	125v / 220v	a b c d	7,5v + 7,5v 4 Amp. 7,5v 2 Amp. - 7,5v 2 Amp. 7,5v 5 Amp. 15v 2 Amp.	64	75	30		57	47	62	1150
502	125v / 220v	a b c d	9v + 9v 0,3 Amp. 9v 0,2 Amp. - 9v 0,2 Amp. 9v 0,45 Amp. 18v 0,2 Amp.	39	44	14	55	34			187
505	125v / 220v	a b c d	9v + 9v 0,5 Amp. 9v 0,25 Amp. - 9v 0,25 Amp. 9v 0,7 Amp. 18v 0,25 Amp.	39	44	14	55	34			187
506	125v / 220v	a b c d	9v + 9v 0,6 Amp. 9v 0,3 Amp. - 9v 0,3 Amp. 9v 0,7 Amp. 18v 0,33 Amp.	43	48	20	61	38			300
507	125v / 220v	a b c d	9v + 9v 0,75 Amp. 9v 0,5 Amp. - 9v 0,5 Amp. 9v 1,2 Amp. 18v 0,5 Amp.	51	56	20	71	43			395
510	125v / 220v	a b c d	9v + 9v 1 Amp. 9v 0,6 Amp. - 9v 0,6 Amp. 9v 1,4 Amp. 18v 0,6 Amp.	51	56	20	71	43			395





ALIMENTACIÓN NORMALIZADOS

REF.	PRIMARIO	TIPO CONEXIÓN	SECUNDARIO	MEDIDAS m/m							PESO GRS.
				A	B	C	D	E	F	G	
511	125v / 220v	a b c d	9v + 9v 1,5 Amp. 9v 0,75 Amp. - 9v 0,75 Amp. 9v 1,9 Amp. 18v 0,75 Amp.	53	60	20	71	45			500
512	125v / 220v	a b c d	9v + 9v 2 Amp. 9v 1,2 Amp. - 9v 1,2 Amp. 9v 2,8 Amp. 18v 1,2 Amp.	58	66	22	83	50			670
514	125v / 220v	a b c d	9v + 9v 3 Amp. 9v 2 Amp. - 9v 2 Amp. 9v 4 Amp. 18v 2 Amp.	64	75	25		57	43	62	990
516	125v / 220v	a b c d	9v + 9v 4 Amp. 9v 2,5 Amp. - 9v 2,5 Amp. 9v 5 Amp. 18v 2,5 Amp.	64	75	35		61	54	62	1340
518	125v / 220v	a b c d	9v + 9v 5 Amp. 9v 2,5 Amp. - 9v 2,5 Amp. 9v 5,75 Amp. 18v 2,75 Amp.	70	84	30		72	50	70	1390
700	125v / 220v	a b c d	12v + 12v 0.15 Amp. 12v 0,08 Amp. - 12v 0,08 Amp. 12v 0,2 Amp. 24v 0,1 Amp.	34	38	13	48	29			125
705	125v / 220v	a b c d	12v + 12v 0.3 Amp. 12v 0,2 Amp. - 12v 0,2 Amp. 12v 0,4 Amp. 24v 0,2 Amp.	39	44	14	55	34			187
709	125v / 220v	a b c d	12v + 12v 0,5 Amp. 12v 0,25 Amp. - 12v 0,25 Amp. 12v 0,75 Amp. 24v 0,25 Amp.	43	48	20	61	38			300
710	125v / 220v	a b c d	12v + 12v 0,75 Amp. 12v 0,4 Amp. - 12v 0,4 Amp. 12v 0,9 Amp. 24v 0,4 Amp.	51	56	20	71	43			395
711	125v / 220v	a b c d	12v + 12v 1 Amp. 12v 0,5 Amp. - 12v 0,5 Amp. 12v 1,35 Amp. 24v 0,5 Amp.	53	60	20	71	45			500
720	125v / 220v	a b c d	12v + 12v 2 Amp. 12v 1 Amp. - 12v 1 Amp. 12v 3 Amp. 24v 1 Amp.	58	66	27	83	53			755
723	125v / 220v	a b c d	12v + 12v 3 Amp. 12v 1,8 Amp. - 12v 1,8 Amp. 12v 4 Amp. 24v 1,8 Amp.	64	75	30		57	47	62	1150








ALIMENTACIÓN NORMALIZADOS

REF.	PRIMARIO	TIPO CONEXIÓN	SECUNDARIO	MEDIDAS m/m							PESO GRS.
				A	B	C	D	E	F	G	
740	125v / 220v	a b c d	12v + 12v 4 Amp. 12v 2,5 Amp. - 12v 2,5 Amp. 12v 6 Amp. 24v 2,5 Amp.	70	84	30		72	50		1390
746	125v / 220v	a b c d	12v + 12v 6 Amp. 12v 3 Amp. - 12v 3 Amp. 12v 7 Amp. 24v 3 Amp.	70	84	40		78	62	70	1870
603	125v / 220v	a b c d	15v + 15v 0,3 Amp. 15v 0,2 Amp. - 15v 0,2 Amp. 15v 0,4 Amp. 30v 0,2 Amp.	42	48	17	57	36			245
606	125v / 220v	a b c d	15v + 15v 0,6 Amp. 15v 0,4 Amp. - 15v 0,4 Amp. 15v 0,8 Amp. 30v 0,4 Amp.	51	56	20	71	43			395
610	125v / 220v	a b c d	15v + 15v 1 Amp. 15v 0,6 Amp. - 15v 0,6 Amp. 15v 1,4 Amp. 30v 0,6 Amp.	53	60	25	71	49			595
615	125v / 220v	a b c d	15v + 15v 1,5 Amp. 15v 0,75 Amp. - 15v 0,75 Amp. 15v 1,75 Amp. 30v 0,8 Amp.	58	66	27	83	53			755
620	125v / 220v	a b c d	15v + 15v 2 Amp. 15v 1 Amp. - 15v 1 Amp. 15v 2,4 Amp. 30v 1 Amp.	64	75	30		57	47	62	1150
630	125v / 220v	a b c d	15v + 15v 3 Amp. 15v 1,8 Amp. - 15v 1,8 Amp. 15v 4 Amp. 30v 1,8 Amp.	70	84	30		72	50	70	1390
920	125v / 220v	a b c d	16v + 16v 1 Amp. 16v 0,5 Amp. - 16v 0,5 Amp. 16v 1,3 Amp. 32v 0,6 Amp.	58	66	22	83	50			670
930	125v / 220v	a b c d	16v + 16v 2 Amp. 16v 1 Amp. - 16v 1 Amp. 16v 2,8 Amp. 32v 1,4 Amp.	64	75	30		57	47	62	1150
440	125v / 220v	a b c d	18v + 18v 0,2 Amp. 18v 0,1 Amp. - 18v 0,1 Amp. 18v 0,3 Amp. 36v 0,1 Amp.	42	48	17	57	36			245
450	125v / 220v	a b c d	18v + 18v 0,5 Amp. 18v 0,3 Amp. - 18v 0,3 Amp. 18v 0,8 Amp. 36v 0,3 Amp.	51	56	20	71	43			395

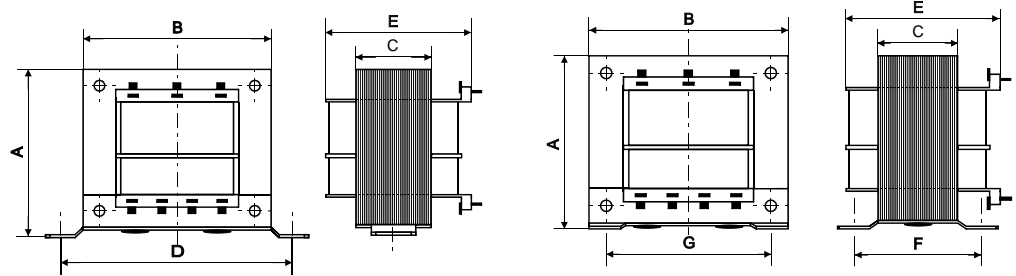

ALIMENTACIÓN NORMALIZADOS

REF.	PRIMARIO	TIPO CONEXIÓN	SECUNDARIO	MEDIDAS m/m							PESO GRS.
				A	B	C	D	E	F	G	
455	125v / 220v	a b c d	18v + 18v 0,75 Amp. 18v 0,4 Amp. - 18v 0,4 Amp. 18v 0,9 Amp. 36v 0,4 Amp.	53	60	20	70	45			500
461	125v / 220v	a b c d	18v + 18v 1 Amp. 18v 0,6 Amp. - 18v 0,6 Amp. 18v 1,4 Amp. 36v 0,6 Amp.	58	66	22	83	50			670
472	125v / 220v	a b c d	18v + 18v 2 Amp. 18v 1,4 Amp. - 18v 1,4 Amp. 18v 2,6 Amp. 36v 1,4 Amp.	64	75	35		61	54	62	1340
483	125v / 220v	a b c d	18v + 18v 3 Amp. 18v 2 Amp. - 18v 2 Amp. 18v 3,6 Amp. 36v 2 Amp.	70	84	30		72	50	70	1390
250	125v / 220v	a b c d	20v + 20v 0,5 Amp. 20v 0,3 Amp. - 20v 0,3 Amp. 20v 0,75 Amp. 40v 0,3 Amp.	53	60	20	71	45			500
251	125v / 220v	a b c d	20v + 20v 1 Amp. 20v 0,5 Amp. - 20v 0,5 Amp. 20v 1,3 Amp. 40v 0,5 Amp.	58	66	27	83	53			755
252	125v / 220v	a b c d	20v + 20v 2 Amp. 20v 1,4 Amp. - 20v 1,4 Amp. 20v 3 Amp. 40v 1,4 Amp.	64	75	35		61	54	62	1340
253	125v / 220v	a b c d	20v + 20v 3 Amp. 20v 2 Amp. - 20v 2 Amp. 20v 4 Amp. 40v 2 Amp.	70	84	36		74	58	70	1620
800	125v / 220v	a b c d	24v + 24v 0,3 Amp. 24v 0,15 Amp. - 24v 0,15 Amp. 24v 0,4 Amp. 48v 0,13 Amp.	43	48	20	61	38			300
802	125v / 220v	a b c d	24v + 24v 0,5 Amp. 24v 0,3 Amp. - 24v 0,3 Amp. 24v 0,6 Amp. 48v 0,3 Amp.	53	60	20	70	45			500
804	125v / 220v	a b c d	24v + 24v 1 Amp. 24v 0,5 Amp. - 24v 0,5 Amp. 24v 1,4 Amp. 48v 0,5 Amp.	58	66	27	83	53			755
806	125v / 220v	a b c d	24v + 24v 1,5 Amp. 24v 0,75 Amp. - 24v 0,75 Amp. 24v 1,75 Amp. 48v 0,8 Amp.	64	75	30		57	47	62	1150



ALIMENTACIÓN NORMALIZADOS

REF.	PRIMARIO	TIPO CONEXIÓN	SECUNDARIO	MEDIDAS m/m							PESO GRS.
				A	B	C	D	E	F	G	
808	125v / 220v	a b c d	24v + 24v 2 Amp. 24v 1 Amp. - 24v 1 Amp. 24v 3 Amp. 48v 1 Amp.	70	84	30		72	50	70	1390
813	125v / 220v	a b c d	24v + 24v 3 Amp. 24v 1,7 Amp. - 24v 1,7 Amp. 24v 3,6 Amp. 48v 1,7 Amp.	70	84	40		78	62	70	1870
814	125v / 220v	a b c d	24v + 24v 4 Amp. 24v 3 Amp. - 24v 3 Amp. 24v 5,8 Amp. 48v 3 Amp.	80	96	40		82	64	80	2450
816	125v / 220v	a b c d	24v + 24v 6 Amp. 24v 3,2 Amp. - 24v 3,2 Amp. 24v 6,6 Amp. 48v 3,2 Amp.	90	108	42		88	66	90	3230
1100	125v / 220v	a b c d	30v + 30v 3 Amp. 30v 1,5 Amp. - 30v 1,5 Amp. 30v 4 Amp. 60v 1,8 Amp.	80	96	40		83	62	80	2340
1110	125v / 220v	a b c d	30v + 30v 4 Amp. 30v 2 Amp. - 30v 2 Amp. 30v 4,7 Amp. 60v 2,4 Amp.	80	96	45		85	65	80	2620
1200	125v / 220v	a b c d	36v + 36v 3 Amp. 36v 1,5 Amp. - 36v 1,5 Amp. 36v 3,5 Amp. 72v 1,75 Amp.	80	96	40		83	62	80	2450
1210	125v / 220v	a b c d	36v + 36v 4 Amp. 36v 2 Amp. - 36v 2 Amp. 36v 4,5 Amp. 72v 2,4 Amp.	80	96	50		91	70	80	2890
1300	125v / 220v	a b c d	40v + 40v 2 Amp. 40v 1 Amp. - 40v 1 Amp. 40v 2,5 Amp. 80v 1,3 Amp.	80	96	37		83	55	80	2100
1310	125v / 220v	a b c d	40v + 40v 3 Amp. 40v 1,5 Amp. - 40v 1,5 Amp. 40v 4 Amp. 80v 1,8 Amp.	80	96	45		86	67	80	2660
1400	125v / 220v	a b c d	48v + 48v 2 Amp. 48v 1 Amp. - 48v 1 Amp. 48v 2,8 Amp. 96v 1,3 Amp.	80	96	45		83	62	80	2490
1410	125v / 220v	a b c d	48v + 48v 3 Amp. 48v 1,5 Amp. - 48v 1,5 Amp. 48v 3,7 Amp. 96v 1,8 Amp.	80	96	50		91	72	80	2890